

## Mini Lathe


Specifications	
Swing over bed	180mm
Distance between centers Model ML200	200mm
Model ML300	300mm
Hole through spindle	20mm
Spindle taper	MT#3
Tailstock taper	MT#2
Spindle speed	Low range 0-1100 rpm ± 10%
High range	0-2500 rpm ± 10%
Output power	250W
Range of threads Metric	0.4-2.0mm(10 thread pitches)
or Imperial	12-52TPI(8 thread pitches)
Net/Gross weight Model 200	33/36 kg
Model 300	37/40 kg
Packing size Model No. 200	670x330x330mm
Model No. 300	770x330x330mm

### Feature:

- Safety switch
- Variable speed
- Four position turret post
- Complete set of change gear
- High accurate

### Standard attachment:

- φ80mm three jaw chuck
- Dead center MT#2
- Gear set

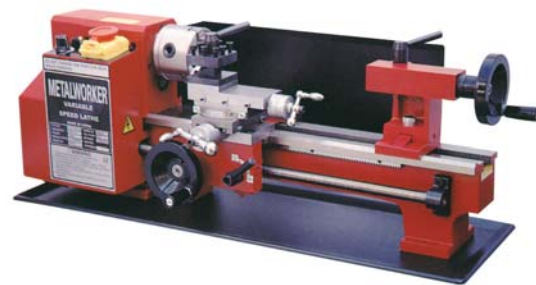

Model No.:ML200

### Optional Accessories


## Bench Lathe

Specifications	
Swing over bed	250 mm
Distance between centers model ML400	400mm
model ML550	550mm
Hole through spindle	20 mm
Spindle taper	MT#3
Tailstock taper	MT#2
Spindle speed(6 steps)	125-2000 rpm
Compound travel	75 mm
Cross slide travel	110 mm
Motor output power	550W
Range of threads	Metric 0.4-3.0mm (12 thread pitches)
or Imperial	10-44TPI (8 thread pitches)
Overall dimension	1230L*680W*450Hmm
Weight(Net/Gross)	145kg/180kg
Packing size	1200L*680W*610Hmm

### Standard attachments

- \*125mm 3-jaw chuck
- \*Dead center MT3/MT2
- \*Change gear set
- \*Wrench set
- \*Oil can



Model No.:ML550

### Optional Accessories


## Multi-Purpose Machine

Model No.:MPM400  
Model No.:MPM500



### Standard Attachment

- φ125mm three jaw chuck
- φ13mm drill chuck with taper shank
- Dead center MT#2, MT#3
- Gear set
- Mill table



Model No.:Mill table

### Drilling & Milling

Drilling capacity	13mm
End milling capacity	16mm
Face milling capacity	30mm
Drilling & milling spindle taper	MT#3
Spindle speed Low range	0-1100 rpm
High range	0-2500 rpm
Output power	350 W
T-slot	12mm
Spindle rotary angle	-25°~+45°
Weight(Net/Gross)	30/45 Kg
Packing size	810x420x500mm

### Optional Accessories

S/N:10017 Stand Model 400	S/N:10027 Tailstock chuck dia.13mm+mt#2
S/N:10018 Stand Model 550	S/N:10028 Cutter 2 pcs set
S/N:10019 Steady rest	S/N:10036 Quick vice 100 mm
S/N:10020 Follow rest	S/N:10037 Mill chuck set φ4-φ16 mm/7 pcs
S/N:10021 Grinding & Milling attachment	S/N:10038-45 End mill φ4-φ16 mm/7 pcs
S/N:10022 11 pcs cutter set 10X10mm	S/N:10046 End mill MT#3/φ30 mm
S/N:10023 φ220mm Face plate	S/N:10047 Clamping kit 42 pcs / bolt 10 mm
S/N:10023A Clamping kit for face plate	S/N:10049 Mill chuck set φ4-φ16 mm/7 pcs
S/N:10024 Rolling center MT#2	
S/N:10025A Four jaw chuck with flange (Independent) φ125mm	
S/N:10026 Quick change rest	

## Mini Drilling Milling Machine

Specifications	
Drilling capacity	13mm
End milling capacity	16mm
Face milling capacity	30mm
Headstock travel(Z)	180mm
Cross axis(X)	100mm
Longitudinal axis(Y)	220mm
Spindle rotary angle	-45°~+45°
Output power	350 W
Spindle speed Low range	0-1100 rpm ± 10%
High range	0-2500 rpm ± 10%
Spindle taper	MT#3
T-slot	12M
Weight(Net/Gross)	50/68Kg
Packing size	560x500x740mm



Model No.:MM13

Optional Accessories		

## Small Mill

Specifications	
Drilling capacity	25mm
End mill capacity	25mm
Face mill capacity	50mm
Spindle stroke	80mm
Throat	232mm
Max distance spindle to table	250mm
Spindle taper	MT3 or R8
Spindle speed High range	100-2000 rpm ± 10%
Low range	100-2000 rpm ± 10%
Table effective size	450X160mm
T-slot size	12mm
Table cross travel	160mm
Table longitudinal travel	300mm
Motor output power	600W
Overall dimension(LXWXH)	685X560X830mm
Weight(net/gross)	135Kg/160Kg
Packing size(LXWXH)	790X680X940mm



Model No.:MM25

Optional Accessories	